

Domekt CF 700 V C6M


Maximal air flow, m ³ /h	650
Maximal air flow, l/s	181
Reference flow rate, m ³ /s	0,130
Reference pressure difference, Pa	50
SPI, W/(m ³ /h)	0,26
Thermal efficiency of heat recovery, %	89
Electric air heater capacity, kW / Δt, °C	1/6,2
Electric preheater capacity, kW / Δt, °C	1/6,2
Supply voltage, V	1~230
Maximal operating current HE, A	11,6
Power supply cable, mm ²	3 × 1,5
Electric power input of the fan drive at maximum flow rate, W	178
Electric power input of the fan drive at reference flow rate, W	73
Noise power level, L _{WA} , dB(A)	46
Noise pressure level, L _{PA} , dB(A)	35
Filters dimensions B×H×L, mm	390×300×46
Unit dimensions B×H×L, mm	491×1220×1020
Maintenance space, mm	1020
Unit weight, kg	100

NEW



Performance

Unit with standard equipment

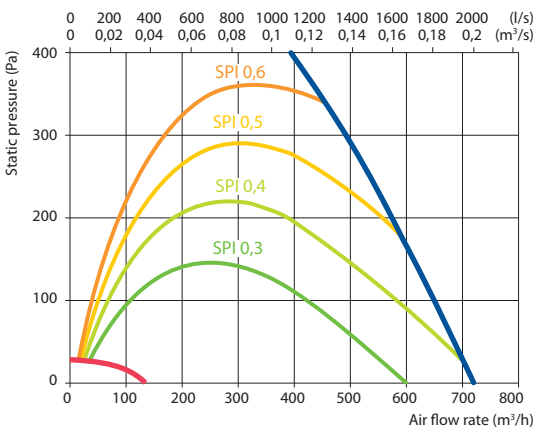

Accessories

Closing damper		AGUJ-M-200+LF230/CM230
Silencer	A/D	AGS-200-50-600-M
	B/C	AGS-200-50-900-M
Water heater		DH-200
PPU		PPU-HW-3R-15-0,4-W2
2-way valve (heater)		VVP47.10-0,4
Water cooler		DCW-0,7-5
2-way valve (cooler)		VVP47.15-2,5
Outdoor grill		LD-200
Water heater-cooler		DHCW-200
DX cooler		DCF-0,7-5
Cooling unit		MOU-18HFN8+KA8140




Temperature efficiency

	Winter				Summer			
Outdoor temperature, °C	-23	-15	-10	-5	0	25	30	35
After heat exchanger, °C	17,3*	17,9*	18,5*	19*	19	22,4	23,1	23,7

indoor +22°C, 20% RH.

* calculations made after evaluation of the preheater.

Shown as right (R1)

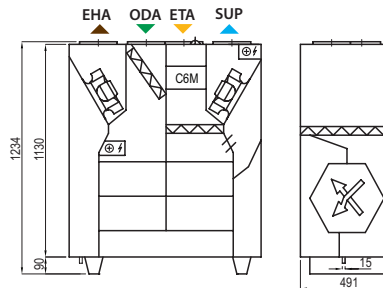

Shown as left (L1)

